




# Zaozhuang Yiding Bearing Co., Ltd.

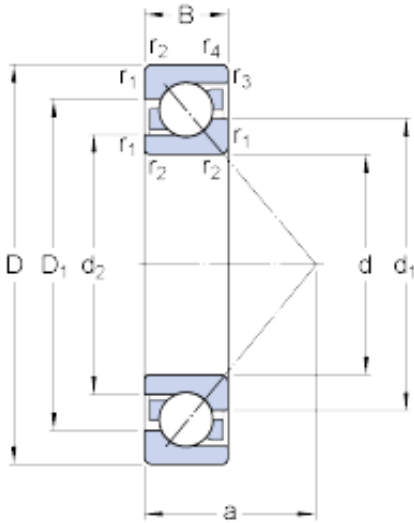

40 mm x 90 mm x 23 mm SKF 7308 BECBY  
angular contact ball bearings

Bearing No. 7308 BECBY

7308 BECBY Bearing 2D drawings and 3D CAD models

Size	90x40x23 mm
Bore Diameter	90 mm
Outer Diameter	40 mm
Width	23 mm
d	40 mm
D	90 mm
B	23 mm
d <sub>1</sub>	59.7 mm
d <sub>2</sub>	49.55 mm
D <sub>1</sub>	71.6 mm
a	39 mm
r <sub>1,2</sub> - min.	1.5 mm
r <sub>3,4</sub> - min.	1 mm
d <sub>a</sub> - min.	49 mm
D <sub>a</sub> - max.	81 mm
D <sub>b</sub> - max.	84.4 mm
r <sub>a</sub> - max.	1.5 mm
r <sub>b</sub> - max.	1 mm
Basic dynamic load rating - C	49.4 kN
Basic static load rating - C <sub>0</sub>	33.5 kN
Fatigue load limit - P <sub>u</sub>	1.4 kN
Reference speed	9000 r/min
Limiting speed	9000 r/min
Calculation factor - k <sub>r</sub>	0.1



## Zaozhuang Yiding Bearing Co., Ltd.

Calculation factor - $k_a$	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - $Y_0$	0.52
Calculation factor - $Y_1$	0.55
Calculation factor - $Y_2$	0.93
Calculation factor - X	0.35
Calculation factor - $Y_0$	0.26
Calculation factor - $Y_1$	
Calculation factor - $Y_2$	0.57
Category	Angular Contact Ball Bearings
Inventory	30.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.64
EAN	7316576650574
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



## Zaozhuang Yiding Bearing Co., Ltd.

Long Description	40MM Bore; 90MM Outside Diameter; 23MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7308 BECBY
Weight / LBS	1.411
Outside Diameter	3.543 Inch   90 Millimeter
Width	0.906 Inch   23 Millimeter
Bore	1.575 Inch   40 Millimeter
bore diameter:	40 mm
radial static load capacity:	33.5 kN
outside diameter:	90 mm
cage material:	Brass
overall width:	23 mm
outer ring width:	23 mm
contact angle:	40 °
maximum rpm:	9000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1.5 mm



## Zaozhuang Yiding Bearing Co., Ltd.

radial dynamic load capacity:	49.4 kN
series:	73
$d_1$	59.5 mm
$d_2$	49.5 mm
$D_1$	71.6 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1 mm
$d_a$ min.	49 mm
$D_a$ max.	81 mm
$D_b$ max.	84.4 mm
$r_a$ max.	1.5 mm
$r_b$ max.	1 mm
Basic dynamic load rating C	53 kN
Basic static load rating $C_0$	35.5 kN
Fatigue load limit $P_u$	1.5 kN
Calculation factor A	0.0189
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.64 kg