




Zaozhuang Yiding Bearing Co., Ltd.

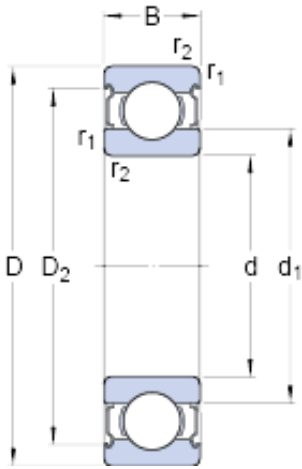

30 mm x 62 mm x 16 mm SKF W 6206-2Z deep groove ball bearings

Bearing No. W 6206-2Z

W 6206-2Z Bearing 2D drawings and 3D CAD models

Size	62x30x16 mm
Bore Diameter	62 mm
Outer Diameter	30 mm
Width	16 mm
d	30 mm
D	62 mm
B	16 mm
d ₁	40.7 mm
D ₂	55.1 mm
r _{1,2} - min.	1 mm
d _a - min.	35 mm
d _a - max.	40.5 mm
D _a - max.	57 mm
r _a - max.	1 mm
Basic dynamic load rating - C	19 kN
Basic static load rating - C ₀	11.4 kN
Fatigue load limit - P _u	0.48 kN
Reference speed	26000 r/min
Limiting speed	13000 r/min
Calculation factor - k _r	0.03
Calculation factor - f ₀	13.9
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF



Zaozhuang Yiding Bearing Co., Ltd.

Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	7316570158649
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Stainless Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stai
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Weight / LBS	0.4321
Outer Race Width	0.63 Inch 16 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Bore	1.181 Inch 30 Millimeter



Zaozhuang Yiding Bearing Co., Ltd.

d_1	40.7 mm
D_2	55.13 mm
$r_{1,2}$ min.	1 mm
d_a min.	35 mm
d_a max.	40.5 mm
D_a max.	57 mm
r_a max.	1 mm
Basic dynamic load rating C	16.5 kN
Basic static load rating C_0	11.2 kN
Fatigue load limit P_u	0.48 kN
Calculation factor k_r	0.03
Calculation factor f_0	13.9
Mass bearing	0.2 kg